



**Zakład Mechaniki i Elektroniki
ZAMEL sp.j.**
J.W. Dzida, K. Łodzińska



ul. Zielona 27, 43-200 Pszczyna, Poland
Tel. +48 (32) 210 46 65, Fax +48 (32) 210 80 04
www.zamelcet.com, e-mail: marketing@zamel.pl

DESCRIPTION

The multifunctional time relay PCM-10/24V has a time functions in automation and control systems. It is equipped with 10 independent operating modes released by power supply voltage or external impulse command (coming from L or N line). It has a wide two time adjustment range t_1 and t_2 and constant switch on/off function. The mode change is possible without waiting for the current cycle to be finished.

FEATURES

- 10 operating modes (external release or from power supply voltage),
- supply voltage control signal - LED green,
- power/relay supply indicator and time measure - LED red,
- two time ranges adjustment,
- wide time adjustment range,
- time measure accuracy,
- constant switch on, switch off function,
- voltage relay output - 1 change over contact (NO/NC) contact max 16 A capacity,
- doublemodular casing.



The device is designed for single-phase installation and must be installed in accordance with standards valid in a particular country. The device should be connected according to the details included in this operating manual. Installation, connection and control should be carried out by a qualified electrician staff, who act in accordance with the service manual and the device functions. Disassembling of the device is equal with a loss of guarantee and can cause electric shock. Before installation make sure the connection cables are not under voltage. The cruciform head screwdriver 3,5 mm should be used to instal the device. Improper transport, storage, and use of the device influence its wrong functioning.

It is not advisable to instal the device in the following cases: if any device part is missing or the device is damaged or deformed. In case of improper functioning of the device contact the producer.




The symbol means selective collecting of electrical and electronic equipment. It is forbidden to put the used equipment together with other waste

TECHNICAL DATA

PCM-10/24V	
Power supply terminals:	-/~ , +/~
Input rated voltage:	24 V AC/DC
Input voltage tolerance:	-15 ÷ +10 %
Supply voltage control indicator:	LED green
Nominal frequency:	50 / 60 Hz
Rated power consumption:	36 mA
External release terminals:	IN, IN (released from L or N)
Release current:	900 µA
Operating modes number:	10
Time measure accuracy:	0,2%
Time adjustment range t_1 :	from 0,1 s to 100 days (step+smooth)
Time adjustment range t_2 :	0,1 s to ∞ (step+smooth)
Power/relay supply indicator and time measure:	from LED red
Output relay parameters:	1NO/NC-16 A/250 V AC1 4000 VA
Number of terminal clamps:	8
Section of connecting cables:	from 0,2 to 2,50 mm ²
Ambient temperature range:	from -20 to +45 °C
Operating position:	freely
Mounting:	rail TH 35 (PN-EN 60715)
Protection degree:	IP20 (PN-EN 60529)
Protection level:	II
Overvoltage category:	II
Pollution degree:	2
Dimensions:	double-modular (35 mm) 90x35x66 mm
Weight:	0,11 kg
Reference standards:	PN-EN 60730-1; PN-EN 60730-2-7 PN-EN 61000-4-2,3,4,5,6,11


APPEARANCE

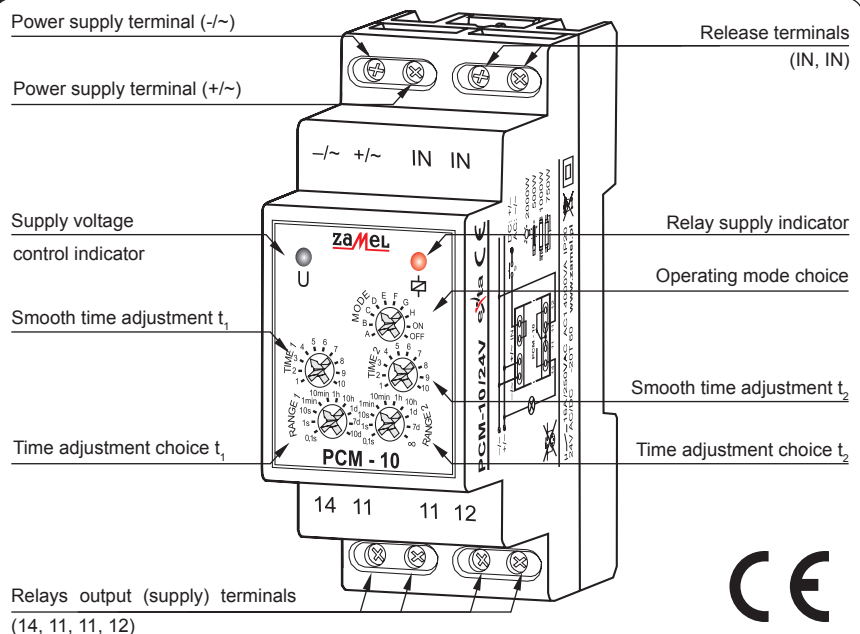

MOUNTING

1. Disconnect the power supply from the mains by the phase fuse, the circuit-breaker or the switchdisconnector that are joined to the proper circuit.
2. Check if there is no voltage on connection cables by means of a special measure equipment.
3. Install **PCM-10/24V** device in the switchboard on TH 35 DIN rail.
4. Connect the cables with the terminals according to installing diagram.
5. Switch on the power supply from the mains.
6. Choose the required operating mode by **Mode** knob.
7. Adjust the time t_1 and t_2 using the $TIME_x$, $RANGE_x$ knob where $t_x = TIME_x \times RANGE_x$.

DIMENSIONS

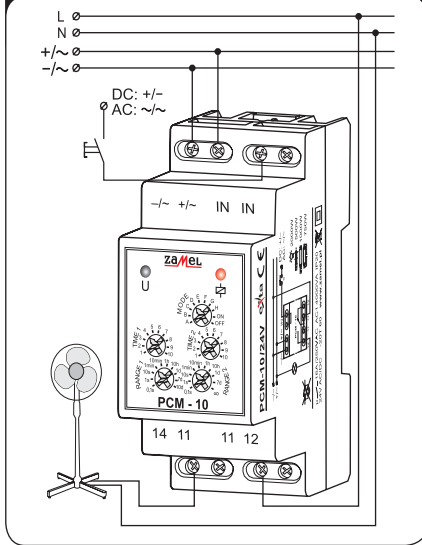

PRODUCT FAMILY

The time relay PCM-10/24V belongs to PCM relay group

PCX-xx (/x)	Voltage type: 24V - 24 V AC/DC U - 12-240 V AC/DC; available for PCM-01, PCM-02, PCM-03, PCM-06 U - 24-250 V AC; 30-300 V DC; available for PCM-07
	Device type: 01 - 1 operating mode - switch on delay 02 - 1 operating mode - switch off delay 03 - 1 operating mode - cyclic change over 04 - 8 (PCP-04) or 10 (PCM-04) operating modes 06 - 2 operating modes - switch on/ switch off delay 07 - 25 operating modes, digital, two ranges of time operation 10 - 10 operating modes, two ranges of time operation
	Casing type: M - modular version (TH 35 DIN rail) P - flush junction box Ø60 version
	Device symbol

WARRANTY CARD

There is 24 months guarantee on the product

Salesman stamp and signature, date of sale

FUNCTIONING

Power supply voltage release:

		SWITCH ON DELAY - after the supply voltage [U] has been applied the t_1 time measure starts. After the time is over the relay switches on (pos. 11-14) for t_2 time. The next switch on interval appears after power supply voltage reset
		SWITCH OFF DELAY - after the supply voltage [U] has been applied, the output relay [R] switches on immediately (pos. 11-14), and the preset time t_1 is measured. After the preset time is measured, the relay [R] is switched off (pos. 11-12) for t_2 time and its another switch on mode. The next switch on interval appears after power supply voltage reset.
		FLASHER STARTING WITH OFF - (Starting from the switch off position). After the supply voltage [U] has been applied, the preset time t_1 is measured. After the time is over, the relay switches on (pos. 11-14) for t_2 time and it switches off again for t_1 time (pos. 11-12). The next switch on interval appears after power supply voltage reset.
		FLASHER STARTING WITH ON - (Starting from the switch on position). After the supply voltage [U] has been applied, the relay is switched on immediately (pos. 11-14) for time. After the time is over, the relay switches off (pos. 11-12) for t_2 time and its another switch on mode for t_1 time. The next switch on interval appears after power supply voltage reset.
		PERMANENT SWITCH ON MODE - After the supply voltage has been applied the relay is switched on permanently. When choosing the mode t_1 and t_2 time adjustment does not matter.
		PERMANENT SWITCH OFF MODE - After the supply voltage has been applied the relay is switched off permanently. When choosing the mode t_1 and t_2 time adjustment does not matter.

External signal release:

		SWITCH ON/OFF DELAY - (retriggerable) after the impulse release has been applied to the powered system (growing value) let the relay be switched off (pos. 11-12), the same, starts the preset time t_1 measurement. After the time is over the relay is switched on (pos. 11-14). After the impulse release fade is detected (falling modulated voltage), the system starts preset t_2 time measurement and after it is finished the relay is switched off (pos. 11-12). In case impulse duration is longer than the preset time t_1 the relay is not switched on. Applying the impulse release during the preset t_2 time measurement does not cause switching off the relay but it starts time measurement after the impulse fade) (falling modulated voltage).
		SWITCH ON/OFF DELAY - (non-retriggerable) - after the impulse release has been applied to the powered system (growing value) let the relay be switched off (pos. 11-12) starts the preset time t_1 measurement. After the time is over the relay is switched on (pos. 11-14). After the impulse release fade is detected (falling modulated voltage), the system starts preset t_2 time measurement and after it is finished the relay is switched off (pos. 11-12). Release input state can change during the time t_2 measurement and does not affect on functioning of the system. In case impulse duration is shorter than the preset time t_1 the relay is not switched on.
		IMPULSE GENERATION WITH AN ALTERNATE TIME DURATION - powered system switches on the relay for t_1 time, and it switches off. The next impulse release causes the relay switches on for t_2 time. Another one switches on the relay for t_1 time, etc. The impulse release time duration does not influence switches on relay time.
		SWITCH OFF DELAY RELEASED BY FALLING MODULATED VOLTAGE - powered system switches on the relay after impulse release switches on the relay. Impulse release fade causes adjusted t_1 time measurement starts with the relay switch off for t_2 time. During t_2 time the system is resistant to signals release. After the t_2 time is finished the relay is switched on again in the moment of applying impulse release (growing value).

Simulation modes:

	or		In order to cause simulation mode one of the release terminals (IN) with L or N line must be externally connected. Simulation mode can operate in MODE=C or MODE=D cycle. Time courses analogical to C and D mode. RANGE must be adjusted for every t_1 and t_2 time whereas TIME is changed accidentally by the system.		
U		Diode signal description	U		Diode signal description
*		Relay switched off, time measure off	*		Relay switched off, time measure on
*		Relay switched on, time measure off	*		Relay switched on, time measure on